

06/22/99

U.S. PTO

12

Express Mail Label No. EJ 874959349 US

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.

693

Total Pages in this Submission

TO THE ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

METHOD OF EDGE GLUEING, AND A TENSIONING AGGREGATE WITH A DEVICE FOR EDGE GLUEING

and invented by:

Andreas STOEHRMANN, Marc-Aurel VOTH

U.S. PTO
09/337947

06/22/99

If a CONTINUATION APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Enclosed are:

Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 33 pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☐ Cross References to Related Applications (if applicable)
 - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
 - d. ☐ Reference to Microfiche Appendix (if applicable)
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings (if drawings filed)
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classified Below
 - j. ☒ Abstract of the Disclosure

Express Mail Mailing Label	
Number	<u>EJ 874959349 US</u>
Date of Deposit	<u>June 27 1999</u>
I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the: Assistant Commissioner for Patents, Washington, D.C. 20231.	

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.

693

Total Pages in this Submission

Application Elements (Continued)

3. ☒ Drawing(s) *(when necessary as prescribed by 35 USC 113)*

- a. ☒ Formal Number of Sheets 6
b. ☐ Informal Number of Sheets _____

4. ☒ Oath or Declaration

- a. ☐ Newly executed *(original or copy)* ☒ Unexecuted
b. ☐ Copy from a prior application (37 CFR 1.63(d)) *(for continuation/divisional application only)*
c. ☒ With Power of Attorney ☐ Without Power of Attorney
d. ☐ DELETION OF INVENTOR(S)

Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).

5. ☐ Incorporation By Reference *(usable if Box 4b is checked)*

The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

6. ☐ Computer Program in Microfiche *(Appendix)*

7. ☐ Nucleotide and/or Amino Acid Sequence Submission *(if applicable, all must be included)*

- a. ☐ Paper Copy
b. ☐ Computer Readable Copy *(identical to computer copy)*
c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☐ Assignment Papers *(cover sheet & document(s))*
9. ☐ 37 CFR 3.73(B) Statement *(when there is an assignee)*
10. ☐ English Translation Document *(if applicable)*
11. ☒ Information Disclosure Statement/PTO-1449 ☒ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☒ Certificate of Mailing

☐ First Class ☒ Express Mail *(Specify Label No.):* EJ 874959349 US

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
693

Total Pages in this Submission

Accompanying Application Parts (Continued)

15. ☒ Certified Copy of Priority Document(s) (if foreign priority is claimed)


16. ☐ Additional Enclosures (please identify below):

Fee Calculation and Transmittal

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	17	- 20 =	0	x \$22.00	\$0.00
Indep. Claims	2	- 3 =	0	x \$82.00	\$0.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$760.00
OTHER FEE (specify purpose)					\$0.00
TOTAL FILING FEE					\$760.00

- ☒ A check in the amount of **\$760.00** to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. **19-4675** as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of _____ as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

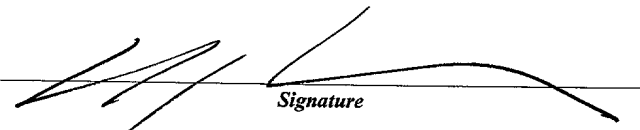
Signature

Dated: JUNE 21, 1999

cc:

BE IT KNOWN that WE, ***Andreas STÖHRMANN and MARC-AUREL VOTH***, have invented certain new and useful improvements in

***METHOD OF EDGE GLUEING, AND A TENSIONING AGGREGATE
WITH A DEVICE FOR EDGE GLUEING***

of which the following is a complete specification:

BACKGROUND OF THE INVENTION

The present invention relates to a method of edge glueing and to a tensioning aggregate which is provided for a device for edge glueing.

During edge glueing an edge hardening medium which will be referred as a glue later on, is applied to the edges of a textile product web. The hardening of the edges is provided for preventing a rolling-in on the edges during making the product ready. The tendency of the non treated edges to roll in is very high in knit wear. In some weave wear there is a tendency of edge fringing. This is prevented by hardening of the edges.

The German patent document DE 12 26 978 discloses a process in which an expanded product web is sprayed with glue at its edges with stationary spraying nozzles under which the product web is transported. Immediately after the spraying, the glue is dried by a drying device with hot air. The spraying nozzle disclosed in this reference is problematic with regard to exact dosing of the glue.

An improved dosing is performed in an edge glueing device disclosed in the German document DE 38 34570A1, which is arranged at an input of a tensioning frame and has an application roller which partially dips into a trough filled with glue. The periphery of the application roller comes

in contact with edge strips of the material web held for example in a needle chain. The application roller which is set in rotation by the material transportation, transports the glue as throughgoing strips or in form of transverse lines, in the event if the periphery of the application roller has an inclined toothing, onto the material web. The corresponding tensioning aggregate provided with an edge glueing device with application rollers is known from the catalog "Synergie-Spannrahmen KTT 2000" of Babcock Textile Maschinen GmbH.

During the application of the glue by an application roller the application quantity depends on the dropping speed, or in other words on the viscosity of the glue, on the surface quality of the glue wheel and the tendency of the glue to form a dried liquid surface, and on the advancement, the absorption of the product and the speed of the web. The application quantity therefore can not be arbitrarily selected in view of the above listed factors.

In the German document DE A2 29 0 54 a material web is provided with an edge hardening of linear elements, whose expansion components perpendicular to the edge extend transversely to the extension components parallel to the edge. This makes possible a hardening of the edges without disturbing elasticity loss in the material web longitudinal direction.

5 A further problem in the edge glueing is the drying of the applied glue. The application of the glue is also performed after the last moisturizing stage of the textile process and before the drying stage. In this case the drying must be adjusted to the higher water content of the product web edges by the glue from up to 15%. For this purpose special drying devices in tensioning frame dryers are disclosed for example in the patent document Z 37 06 615 C2, DE 81 11 908 UNDE 195 25 545. When the glue application is performed after the drying of the product web, an initial drying device is required.

10 It is known from the German patent document DE 195 22 124 A1 it is known to use, instead of conventional water containing synthetic plastic dispersions, melting adhesives as a glue. The melting adhesives are applied at a temperature of 150-200°C and hardened in several seconds without a drying device. However, for melting of the glue, it requires special application devices provided with heating means, such as for example spray
15 application heads, single hole valves or slot valves.

20 German patent document DE 195 06 294 A1 discloses a UV hardenable, water free synthetic plastic as a further hardening agent for hardening of the edges of threaded webs. The synthetic plastic is applied with a pattern such as transverse strips, circles, meanders, etc. with freely

remaining cutting edge and subsequently hardened by UV light of a UV lamps.

SUMMARY OF THE INVENTION

Accordingly, it is an object of the present invention to provide a method of edge glueing which avoids the disadvantages of the prior art.

5 More particularly, it is an object of present invention to provide a method for edge glueing which requires less glue and therefore less drying energy than in the case of application by an application roller.

It is also an object of present invention to provide a tensioning aggregate for performing the inventive method.

10 In keeping with these objects and with others which will become apparent hereinafter, one feature of present invention resides, briefly stated in a method of edge glueing, in which a glue is applied in a spin spraying process.

15 With the inventive method the glue is applied in the spin spraying process on the edges of the product web. The spin spraying nozzles are utilized, which produce a fine jet moving over a circular path. Such a spin spraying nozzle is disclosed for example in the patent document EP 0 677 333 A1. During the transportation of the product web under the spin spraying nozzles the circular path of the glue jet is pulled out into a

spiral. By producing fine glue spirals, a sufficient hardening with a low glue quantity is provided. The lower glue quantity makes possible, in addition to saving of the glue, also saving of drying energy. The fine glue spirals have a certain elasticity for the product web, which facilitates the further treatment stages. The glue track can be applied continuously or intermittently.

A predetermined, constant distance of the spin spraying nozzle guarantees a uniform glue application. By varying in distance, the width of the glue track can be changed. In particular, smaller glue tracks can be produced, so that during making ready of the product only a small fraction of the product web must be cut. Also, the throwing-in tendency can be influenced over the width of the glue track.

In addition to the variation of the distance of the spin spraying nozzle to the contact web, also the pressure with which the glue is supplied as well as the pressure of the suppl air can be varied. Thereby it is possible, also in the case of changes of product web speed, to maintain the application quantity constant.

The inventive spin spraying process guarantees also a higher reproducibility of the application quantity of the glue than in an application by a glue wheel.

The maximum product web speed in the event of the spin spraying depends less on the viscosity of the glue than during the application of the glue with a glue wheel. A glue with a higher viscosity can be utilized. A mixing of the glue with water for reducing the viscosity is no longer necessary, or the required water quantity is lower. Also, a lower water content of the glue leads to a drying with a lower energy consumption.

The glue application can be performed by corresponding arrangement of the spin spraying nozzle above or below of the expanded product web at its edges, or in its central region. With the use of different spin spraying nozzles, different glue tracks are possible.

A special uniform pattern of the glue application is obtained when in accordance with the present invention the product web is smoothed by providing a certain longitudinal tensioning. When the product web is smoothed, a uniform glue application is possible with a particularly low glue quantity.

In accordance with a preferred new feature of the present invention, the glue can be formed as conventional synthetic plastic dispersions or synthetic plastic solutions used for edge hardening. In addition, also starch, bone glue or further organic solutions can be utilized.

5 A warming of the glue, in particular of synthetic dispersions or synthetic solutions, before the spin spraying in particular at a temperature of 20-80°C, reduces the viscosity of the glue. The prewarmed glue can be sprayed without being dissolved or less dissolved and dries faster than glue sprayed at room temperature.

10 The quantity of the glue applied by the spin spraying nozzle can be regulated by variations of the pressure of the glue supplied to the spin spraying nozzle and/or by the pressure of the air supplied to the spin spraying nozzle. The applied glue quantity can be determined by resistance measurements.

15 In accordance with a further feature of the present invention, a tensioning aggregate is proposed with a device for edge glueing, in which the product web is expanded and smoothed, and the spin spraying nozzle is located at a predetermined distance relative to it. The spin spraying nozzles are located either above or under the product web at the both edges and, in the case of a doubled product web width, are arranged in the middle of the product web.

20 The inventive tensioning aggregate can be formed as a tensioning frame in some cases with a dryer, as over extension filled with a subsequent shrink dryer or a leveling frame.

In accordance with another embodiment of the present invention, the pressing roller is designed as a negative pressure roller, so as to improve the flatness of the product web on the needle roller and thereby the glue track.

5 In accordance with a further embodiment of the present invention, the arrangements for edge glueing are especially simple when they are provided with means for releasing the product web from the retensioning chain and for scaling as well as with holding means, and also in another embodiment with a pressing holder and a holding wire.

10 The novel features which are considered as characteristic for the present invention are set forth in particular in the appended claims. The invention itself, however, both as to its construction and its method of operation, together with additional objects and advantages thereof, will be best understood from the following description of specific embodiments when
15 read in connection with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 shows a tensioning aggregate in accordance with a first embodiment, with spin spraying nozzles arranged before mounting means in an inlet region;

5 Figure 2 is a view showing a lateral section of the aggregate of Figure 1, on an enlarged scale in accordance with the present invention;

Figure 3 is a plan view of an arrangement of spin spraying nozzles in accordance with the present invention;

10 Figure 4 is a view showing a tensioning aggregate in accordance with a second embodiment with a device for edge glueing arranged on a tensioning chain and provided with spin spraying nozzles;

Figures 5 and 6 are views corresponding to Figures 2 and 3 but showing the second embodiment of the present invention; and

15 Figures 7 and 8 are views showing a further device for edge glueing with spin spraying nozzles of a simplified construction.

DESCRIPTION OF PREFERRED EMBODIMENTS

Example 1

A tensioning aggregate in accordance with a first embodiment of present invention has an inlet device 1, a tensioning chain 2 arranged at both lateral edges of the tensioning aggregate, and a first drying field 3 of a dryer 4. An outlet device of the tensioning aggregate is not shown.

The inlet device 1 has an operator stand 5, an inlet desk 6 with pulling means, for example driveable rollers, and a device such as a needling device 7 for mounting of product web edges on the tensioning chain 2. In the inlet device 1, a product web 8 passes under the operation stand 5. During its further running in the inlet desk 6, the product web 8 is guided around an expansion roller 9, a driveable pulling roller 10, a further extension roller 11, a guiding roller 12 and a further driveable pulling roller 13, toward a needling device 7.

The needling device 7 has an expansion means. In particular, the needling means include in this example at each side three roll fingers 15 arranged in the transporting direction 14 of the product web one after the other, and a mounting means for mounting the edges of the product web 8 on the tensioning chain 2, in particular a brush band 16 arranged above the product web 8 and a pressure band 17 arranged under the product web 8. The needling fingers 18 include driveable, conical rollers whose diameter

reduces toward the edge of the product web 8. Their axes are substantially offset relative to one another so that the product web 8 is guided slightly wavelly, over the first, under the second, and over the third rolling finger 15.

A tensioning chain 2 surrounds a chain band 18 with a needle box 19. It is guided in an upper and in a lower chain guide 12 and deviated on a front chain wheel 21 and a rear chain wheel which is not shown in the drawings. The chain wheels 21 are arranged in this case vertically. The tensioning chain 2 with the chain band 18 and the chain guide 20 extends through the dryer 3. The position of the chain band 18 is shown in Figure 1 by dash lines. In a first drying field 3 of the dryer 4 the position of a circulating fan 22 is identified.

A device for edge glueing has spin spraying nozzles 23 which in this example are arranged at the height or behind the expansion means or before the mounting means. Each spin praying nozzle 22 is mounted above the third rolling finger 15 of the needling device 17 at both sides of the tensioning aggregate 2. The position of the spin spraying nozzle 23 is selected so that a projection of an opening of the spin spraying nozzle 23, or in other words the bottom surface of a spraying cone exiting from the spin spraying nozzle, is located on the product web 8 on the inner side of the needle block 19 of the tensioning chain 2 near the needle box 19, and an opening surface extends horizontally or at an acute angle to horizontals. In

this example, the opening surface extends at an acute angle which opens opposite to the transporting direction, or in other words the axis of the spraying cone extends at an acute angle to verticals.

The brush band 16 has two bands 24 and 25, which are guided around a greater roller 26 which is a front roller as considered in the transporting direction 14, and also over a smaller roller 27 located behind it. The bands 24 and 25 are provided with brushes and arranged at a distance from one another, so that between the brushes a remaining strip 28 is provided. The spin spraying nozzle 23 and the band 24, 25 of the brush band 16 are arranged so that the projection of the opening of the spin spraying nozzle 23 on the product web 8 and the remaining strip 28 between the band of the brush band 16 are located on straight lines extending in the transporting direction 14.

The pressing band 17 is slightly offset forwardly in the transporting direction 14 toward the brush band 16 and arranged inside the chain band 18 with the needle box 19. It is also guided around the greater roller 29 which is a front roller in a transporting direction and around a rear smaller surface. The outer surface of the pressure band 17 is provided with an adhesive material, for example a rubber material. The pressure band 17 and the brush band 16, as shown in Figure 2, are arranged so that they without contacting the product web 8 contact a path extending at an acute

angle relative to the tensioning chain 2. A measuring sensor 31 is arranged behind the needling device 7 before the first drying field 3. It is used for a resistant measurement.

5 The brush band 16 can have only a band with brushes arranged so that at its outer surface in a middle region, a strip which is free from the brushes is retained. In this case, the spring spraying nozzles 23 and the brush band 16 are arranged so that the projection of the opening of the spin spraying nozzle 23 on the product web 8 and the strip 28 remaining free from the brushes in the brush band 16 is located on a straight line extending in a transporting direction 14.

10 Alternatively, the tensioning chains 2 of the chain bands 18 can be provided with tensioning clamps. Instead of the upper brush band 16 and the lower pressure band 16, the device for mounting of the product web edges on the tensioning chain 2 has means for pressing the product web 8 on the clamps and for closing the clamps. The tensioning chain 2 can be provided also with horizontal chain wheels.

15 In wider tensioning aggregates in which product webs 8 of a double width are treated, two spin spraying nozzles 23 are arranged in the center of the product web 8.

During the operation, for example a moist product web 8 is supplied under the operation stand 5 through and to an inlet desk 6. In a further course in the inlet desk 6, the product web 8 is guided over the expansion roller 9, the driveable pulling roller 10, the expansion roller 11, the guiding roller 12, and the driven pulling roller 13 toward the needling device 7. Forces which act at both edges on the product web 8 are applied to the expansion rollers 9 and 11 so that it is expanded and smoothed. The pulling rollers 10 and 13 accelerate the product web 8 to a desired speed. The peripheral speed of the pulling rollers 10 and 13 is between 20 and 40 m/man ending on the treatment process. In the clamping aggregates 2 with the dryers 4 for after treatment of wet treatment processes the speed is between 25 and 35 m/min.

In the needling device 7 the edges of the product web 8 are outwardly smoothed by three roll fingers 18 and thereby further expanded. A first roll finger 15 acts downwardly, the second roll finger 15 acts from above, and the third roll finger 18 acts from below on the product web 8. In a transporting direction 14 behind the roll fingers 18, the edges of the product web 8 are first engaged from below by the pressure band 17 and then from above by the brush band 16. The pressure band 17 and the brush band 16 move with a slightly higher speed than the pulling rollers 10 and 13.

5 The distance of the spin spraying nozzle 23 arranged above the third roll finger 15 from the upper surface of the product web 8 is between 3 and 30 mm. In processes in connection with a dry treatment of woven and knitted fabrics, such as a dry treatment in the tensioning aggregate and a dryer or for leveling in a shrink dryer, a distance amounts to 3-30 mm. In this example, it amounts to 18 mm.

The spin spraying nozzle 23 can be formed as a point nozzle with a diameter of the opening of 2-5 mm. In this example the diameter of the opening is 3 mm.

10 The glue which is used here can be an organic solution or dispersion with water, starch or bone glue. Preferably, it is a glue which is soluble in water, softener-free and self-cross linking. It is preferably a synthetic plastic dispersion, in particular an ether polymer dispersion, or a synthetic plastic solution. The glass conversion point of the glue must be
15 between +20 and +35°C, for example +30°C.

The glue is supplied to the spin spraying nozzle 23 with an over pressure of 0.1-0.3 bar, for example substantially 0.2 bar, and the air is supplied with a pressure which is adjustable from 1-6 bar. The desired application quantity is adjusted with the help of the values determined by the

measuring sensor 31, by variation of the pressure of the glue and/or the pressure of the air.

The spin spraying nozzles 23 produce a fine jet of glue which moves over a circular path and acts perpendicularly under the spin spraying nozzles 23 on the product web 8. Due to the movement of the product web 8 under the spin spraying nozzles 23, the circular path of the jet is pulled out to form a spiral 31. In other words, the spin spraying nozzles 23 produce spirals 31 on the movable product web 8.

The tracks of longitudinally pulled spirals 31 of glue are formed on the edges of the product web 8. In this example, the glue is applied continuously. It forms a throughgoing track. The glue can be applied intermittently. Thereby tracks with spaced, longitudinally pulled spirals of glue are formed.

In a knitted fabric, for example single jersey, an application quantity of 0.5-1.2 g/g of glue per meter of a track is required on a product web 8. In comparison, during application of the same glue with a glue wheel, substantially 30% more glue is required.

After the application of the glue by the spin spraying nozzles 23, the edges of the product web 8 are first engaged from below by the

pressure band 17 and then from above by the brush band 16. The pressure band 17 and the brush band 16 leads the edges of the product web 8 to the needle box 3. The partitioned brush band 16, which is due to its free strip 28 does not contact the product web 8 at the glue tracks, presses the product web 8 in the needle box 19. Since the speed of the brush band 16 and the pressure band 17 is greater by 20-70% preferably by 25-30% then the speed of the tensioning chain 2 and thereby the inlet box 19, the edges of the product web 8 are pressed wavy in the needle box 19. In other words, the product web is needled with an advance of 20-70% in particular 25-30%.

The needled product web 8 is transported in the dryer 4 and is dried, in some cases with shrinkage. The energy required for drying of the edges of the product web 8 is lower because of the lower quantity of glue than in the case of an edge glueing with a glue wheel.

Example 2

A tensioning aggregate in accordance with a second embodiment is different from the aggregate of the first embodiment in that the device for edge glueing is located behind the inlet device 1 on the tensioning chain 2. It has at each edge or on early spraying point of the product web 8, a spin spraying nozzle 23 as well as means for loosening the product web 8 from the tensioning chain 2 and for smoothing the product

web 8 and the mounting means for another mounting of the product web edges of the tensioning chain 2.

In this embodiment of a tensioning aggregate with a tensioning chain 2 with a needle box 19, has means for loosening and smoothing of the product web 8, and in some cases driveable brush rollers 33 for holding the product web 8 on the needle box 19 and a driveable pressing roller 34. The mounting means has a driveable brush roller 35 with a recess for the glue track. The brush rollers 33, the pressing rollers 34, and brush roller 35 are located in a transporting direction 14 one after the other with small distances therebetween. The brush rollers 33 and 35 are located above the product web 8.

The pressing roller 34 is arranged under the product web 8, toward the interior of the product web 8 closely near the needle box 19 of the tensioning chain 2. It extends in a part of its periphery over the plane defined by the both-side chain bands 18. The pressing roller 34 can be formed also as a negative pressure roller.

The corresponding spin spraying nozzle 23 is located between the brush rollers 33 and 35, above the pressing roller 34 so that a projection of the opening of the spin spraying nozzle 23 is located inside the position of the needle box in the upper region of the pressing roller. The opening

surface of the spin spraying nozzle 23 extends here horizontally. As in the example 1, it can extend at an acute angle to the horizontal.

The width of the brush roller 35 is selected so that it extends over the needle box 19 and the desired glue track. It amounts to approximately three times the width of the needle box 19. The pressing roller 34 and the brush roller 35 are in contact, if no product web 8 is guided between them and are closed with one another toward the product web inner side. In the region of the glue track, or in other words the extension of the projection of the spin spraying nozzle 23 in the transporting direction 14, the brush roller 34 has a strip 36 which is retained by bristles.

The brush roller 35 and 36 are supported so that they are displaceable horizontally and the pressing roller 34 is supported so that it is displaceable vertically. The pressing roller can be connected with an asynchronous motor.

During the operation, the needled product web 18 is held at its edge first by the brush roller 33 which is driven with the same speed as the tensioning chain 2, in the needle box 19, and is lifted by the pressing roller 34 at its edges from the needle box 19. The pressing roller 34 which is driven with an advance, with which the product web 8 is needled in a needle device 7, with an equalized, higher speed than the tensioning chain 2 lifts the

web product edge from its surface flatly and transports its under the corresponding spraying nozzle 23. The application of the glue by the spin spraying nozzle corresponds to the example 1. In particular, the distance of the spin spraying nozzles 23 to the surface of the pressing roller 34 is fixedly adjusted.

By the subsequent brush roller 34, which is driven at the same speed as the tensioning chain 2, the web product edge, with the same advance as before the spraying, is needled again. The peripheral speed of the brush rollers 33 and 35 and the tensioning chain 2 can be for example 20 m/min, and of the pressing roller 34 with an advance of 25% can equal to 25 m/min.

For adaptation to different advances, the brush rollers 34 and 35 are displaced vertically and the pressing roller 34 is displaced horizontally.

In order to prevent dried glue residuals on the product web during further movement, the device is provided with means for closing the nozzle opening when a stoppage occurs.

Example 3

A tensioning aggregate in accordance with a third embodiment of the present invention has an arrangement for edge glueing

which, similarly to the tensioning aggregate of the embodiment 2, is located behind the inlet device 1 on the tensioning chain 2. It has on each chain of the product web 8, a spin spraying nozzle 23 as well as means for loosening the product web 8 from the tensioning chain 2 and for clamping the product web 8 and holding means for holding the product web 8.

In the third embodiment of the tensioning aggregate with a clamping chain 2 with the needle box 19, the means for loosening and clamping of the product web 8 have each a pressing roller 37 which is located under the product web 8 and arranged toward the interior of the product web 8 closely near the needle box 19. It extends with a small part of its periphery outwardly beyond the plane defined by the two-side chain bands 18. The height of the outwardly extending part of the pressing roller 38 substantially corresponds to the needle height. The spin spraying nozzle 23 is arranged in the zenit of the pressing roller 37.

The width of the pressing roller 37 is substantially double the diameter of the spin spraying nozzle 23. The spin spraying nozzle 23 is arranged above the outer region of the pressing roller 37. At the outer side, or in other words at the side of the pressing roller 37 facing the edge of the product web 8, a holding means formed as a U-shaped holding device 38 is located. The pressing roller 36 can have a rough outer surface. Due to the

rough outer surface a fine subdivision of the material folds is enhanced. Its outer surface can be also provided with a coated latex band.

The pressing roller 37 is connected with the drive of the clamping chain 2. It can be connected with a torque magnetic motor. A vertical hold of the pressing roller 37 and a hold of the spin spraying nozzle 23 are connected with one another so that the distance between the outer surface of the pressing roller 37 and the spin spraying nozzle 23 is fixedly adjustable. The arrows in Figure 8 mean that the pressing roller 37 and the spin spraying nozzle 23 are jointly height-adjustable.

During the operation, the bottom of the U of the holding wire 38 is located on the product web 8 and holds the outer edge of the product web 8 in the needle box 19. The pressing roller 37 is driven with the same speed as the tensioning chain 2. The pressing roller 38 lifts the product web 8 so far that it abuts on the roller surface of the pressing roller 38 being planely clamped with advancement of the needled product web 8 above the needle box 19, or in other words in material folds which follow one another. The material folds are formed with a rough surface smaller than the material folds formed by the needling in the needle box 19.

It will be understood that each of the elements described above, or two or more together, may also find a useful application in other types of methods and constructions differing from the types described above.

While the invention has been illustrated and described as embodied in method of, and a tensioning aggregate with a device for edge glueing, it is not intended to be limited to the details shown, since various modifications and structural changes may be made without departing in any way from the spirit of the present invention.

Without further analysis, the foregoing will so fully reveal the gist of the present invention that others can, by applying current knowledge, readily adapt it for various applications without omitting features that, from the standpoint of prior art, fairly constitute essential characteristics of the generic or specific aspects of this invention.

What is claimed as new and desired to be protected by Letters Patent is set forth in the appended claims.

CLAIMS

1 1. A method of edge glueing, comprising the steps of
2 expanding a product web; transporting the expanded product web at least at
3 its edges in a predetermined distance from a spraying nozzle; and spraying
4 the expanded web with a glue, said spraying being performed by applying
5 the glue in a spin spraying process.

2 2. A method as defined in claim 1; and further comprising
3 holding the product web under a longitudinal tensioning.

1 3. A method as defined in claim 1, wherein said spraying with
2 glue includes using the glue composed of a solvent-containing product on
3 the basis of water.

1 4. A method as defined in claim 3, wherein the product is
2 selected from the group consisted from a synthetic plastic dispersion and a
3 synthetic plastic solution.

1 5. A method as defined in claim 1; and further comprising the
2 step of heating the glue before spraying to a temperature of 20-80°C.

1 6. A method as defined in claim 1; and further comprising the
2 steps of measuring a quantity of the applied glue; and regulating the quantity
3 by varying the pressure of a substance applied by the spin spraying nozzle.

1 7. A method as defined in claim 6, wherein said regulating
2 includes regulating by varying the pressure of the glue supplied by the spin
3 spraying nozzle.

1 8. A method as defined in claim 6, wherein said regulating
2 includes varying the pressure of an air supplied through the spin spraying
3 nozzle.

1 9. An arrangement comprising a tensioning aggregate; a
2 device for edge glueing, said tensioning aggregate including a region in
3 which product web is expanded on its edges and smoothed, said device for
4 edge glueing including a spin spraying nozzle which is adapted to be
5 arranged at a predetermined distance from the product web.

1 10. An arrangement as defined in claim 9, wherein said spin
2 spraying nozzle is arranged at a predetermined distance from the edges of
3 the product web.

1 11. An arrangement as defined in claim 9, wherein said spin
2 spraying nozzle is arranged at a predetermined distance from the sensor of
3 the product web.

1 12. An arrangement as defined in claim 9; and further
2 comprising a tensioning chain; an inlet device provided with pulling means,
3 expanding means and mounting means for mounting the edges of the
4 product web on said tensioning chain and located one after the other, so that
5 in the region of said pulling means and said mounting means the product
6 web is expanded and smoothed, said spin spraying nozzle being located in
7 said region at a height or behind said expanding means in front of said
8 mounting means, said mounting means being provided with openings for
9 glue tracks.

10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2

1 14. An arrangement as defined in claim 13, wherein the means
2 have a pressing roller, said pressing roller being vertically displaceable while
3 said mounting means being horizontally displaceable.


1 15. An arrangement as defined in claim 14, wherein said
2 pressing roller is formed as a negative pressing roller.

1 16. An arrangement as defined in claim 9; and further
2 comprising an inlet device; a tensioning chain, said device for edge glueing
3 being located behind said inlet device on said tensioning chain with a needle
4 box; and means for releasing the product web from the tensioning chain and
5 for clamping the product web, and holding means.

1 17. An arrangement as defined in claim 16; and further
2 comprising a pressing roller adapted to be arranged on the edges above the
3 product web under said needle box; and a holding wire arranged laterally
4 near said pressing roller on said needle box, said spin spraying nozzle being
5 arranged above said pressing roller.


ABSTRACT OF THE DISCLOSURE

In a method for edge glueing and in an arrangement including a tensioning aggregate with a device for edge glueing, a glue is applied in a spin spraying process, and the application is performed on the product web which is extended at the edges and smoothed.

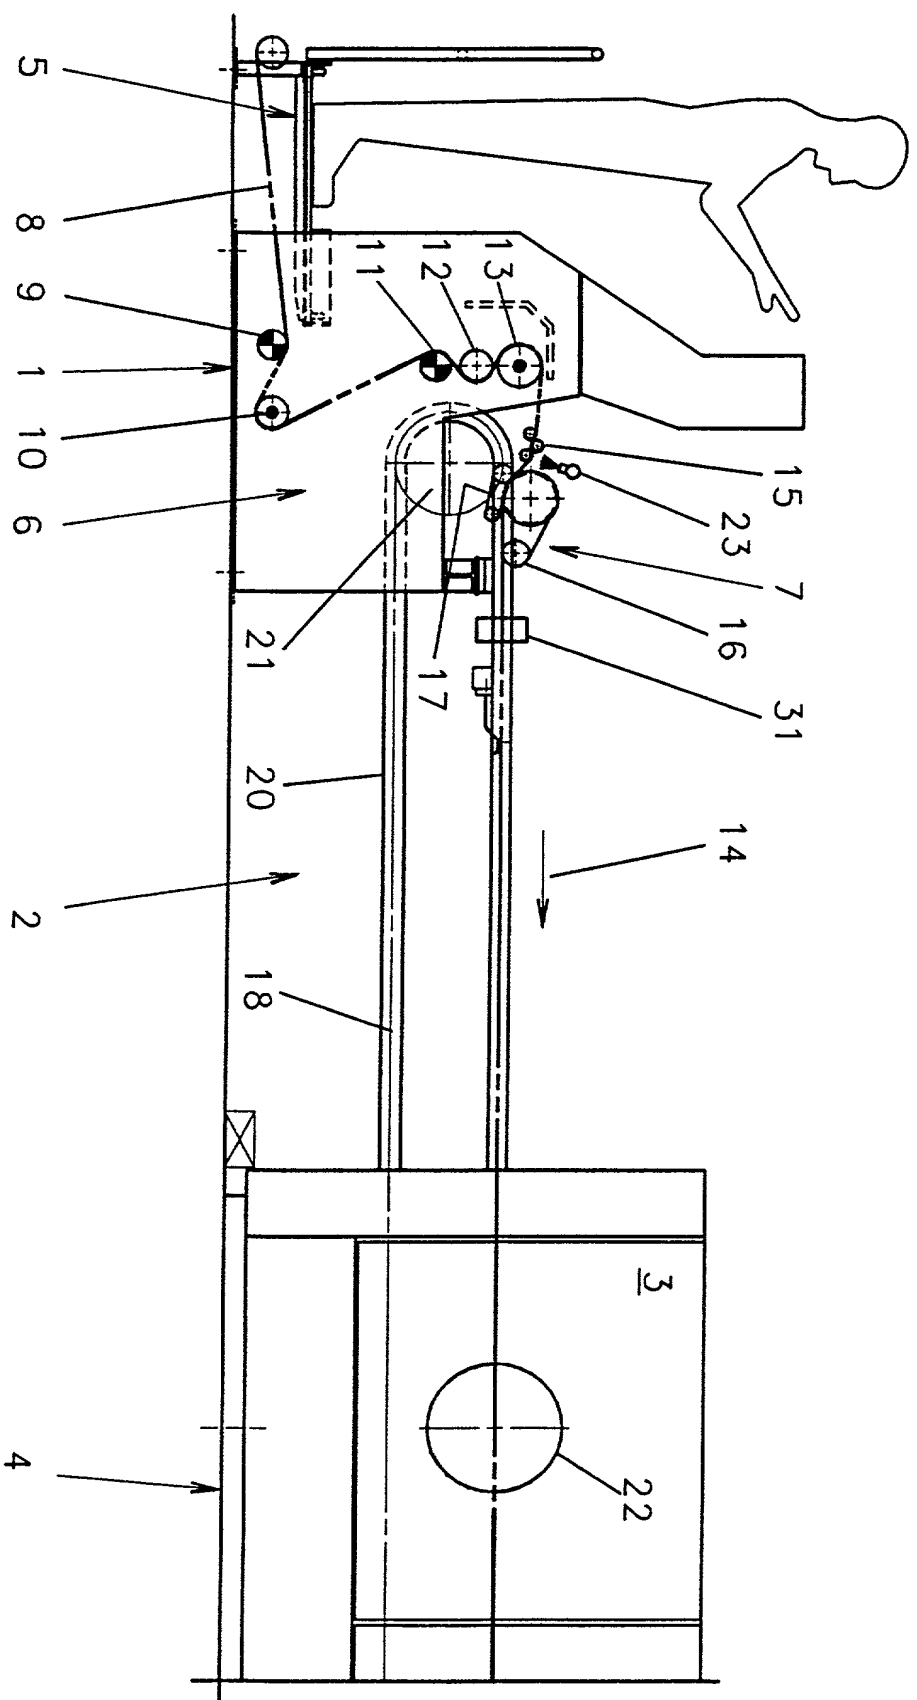


0933947 000000

Figure 1

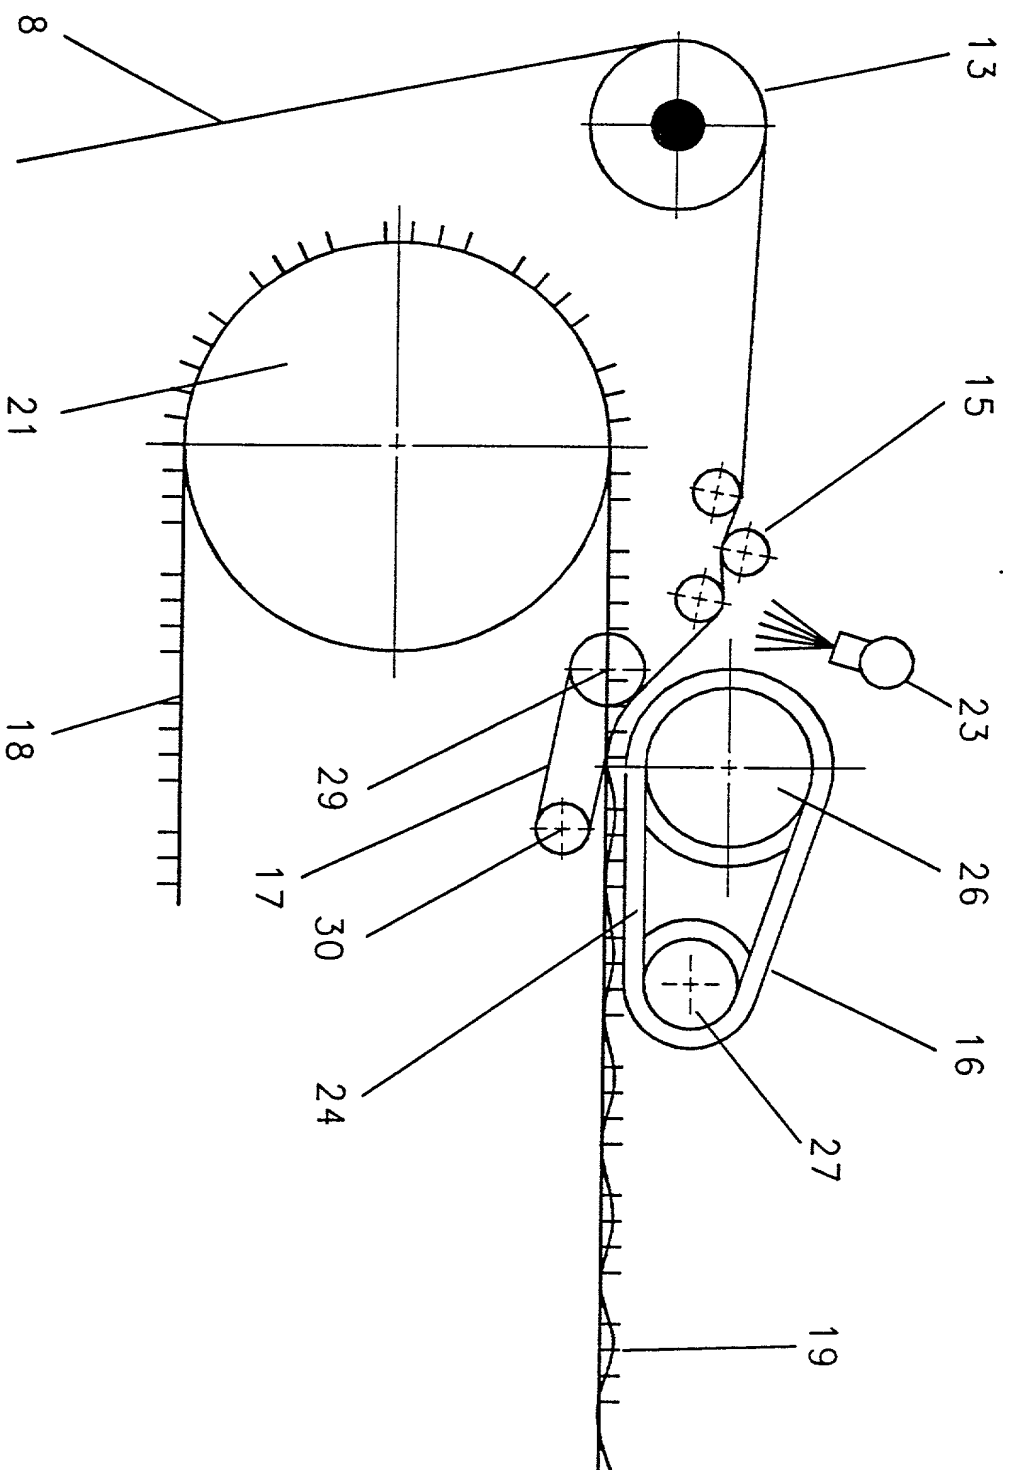

09337947 1362205



Figure 2

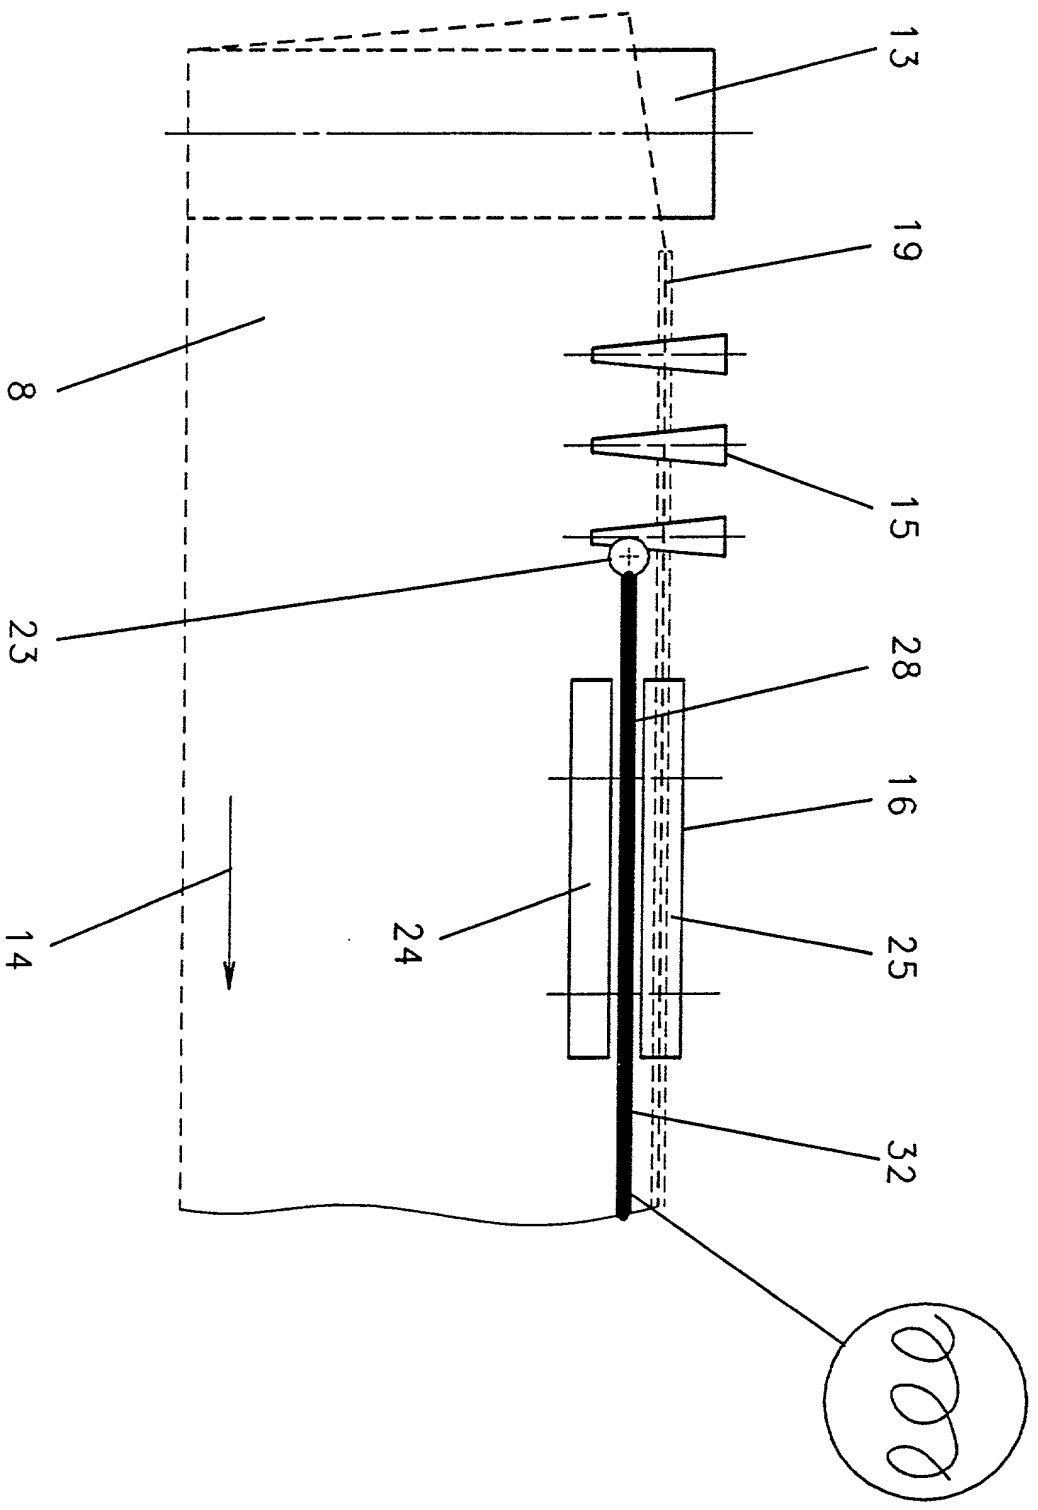


09337947 : 062209


Figure 3

000000 4462860

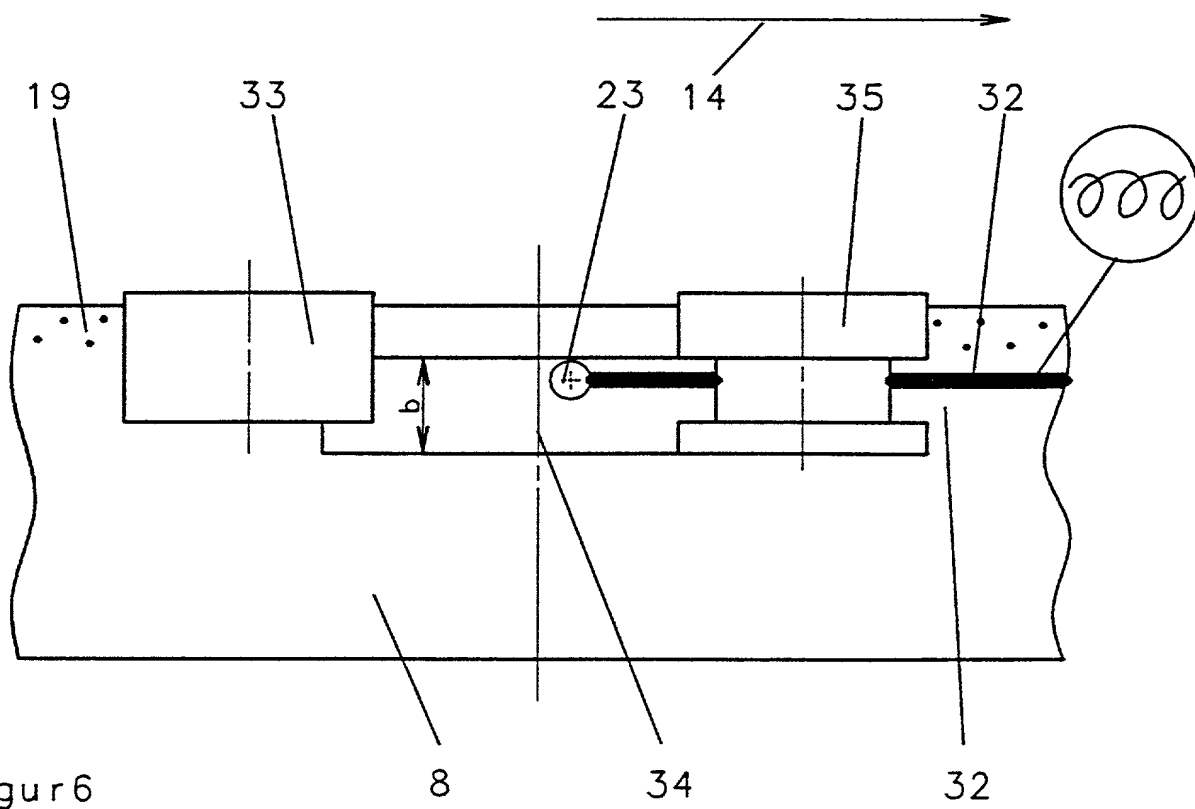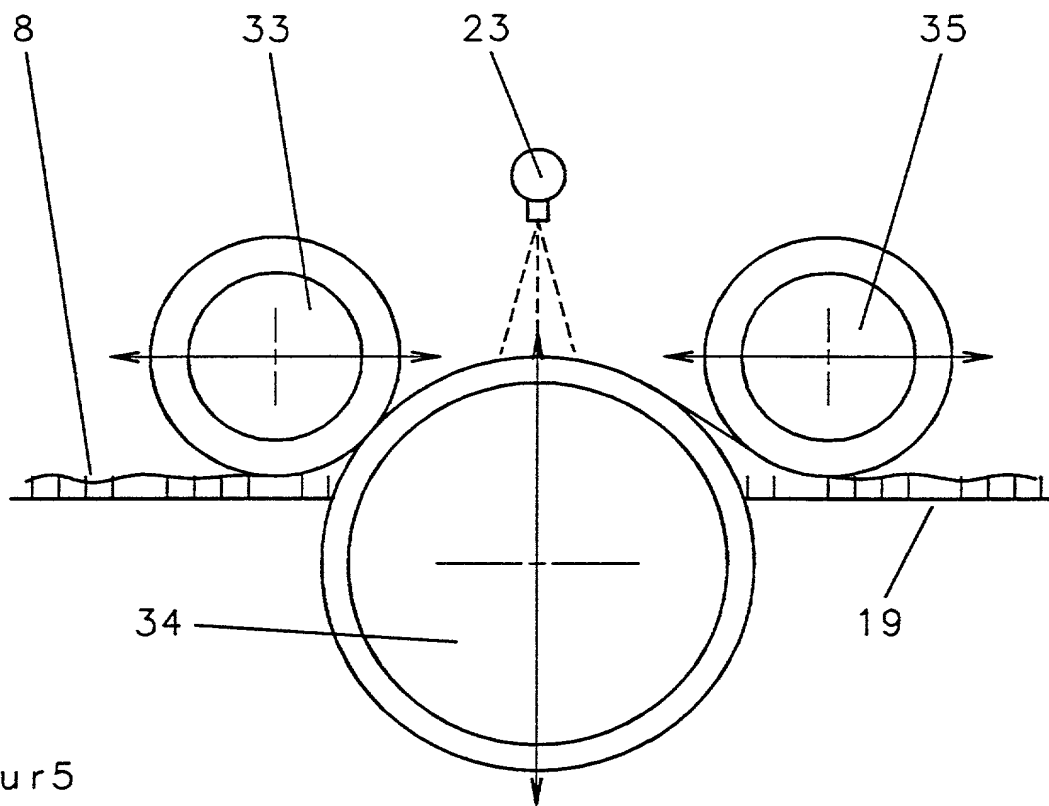

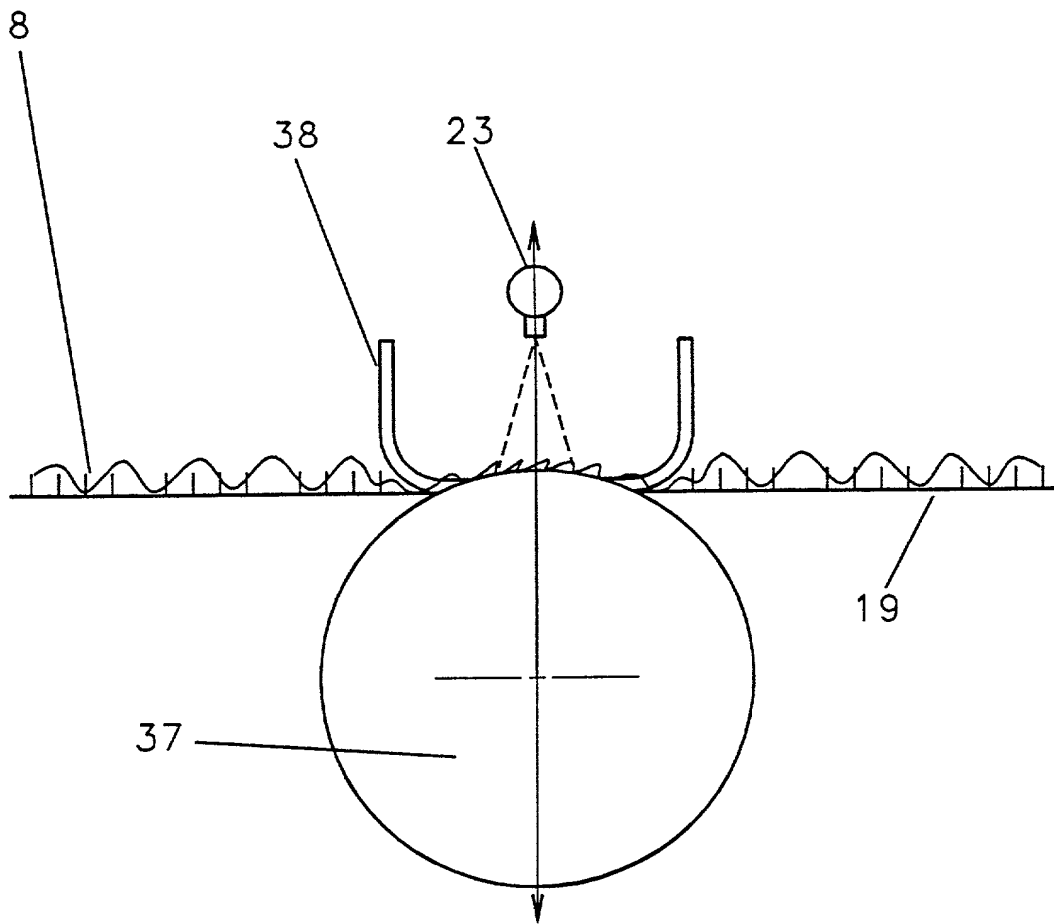

Figur 7

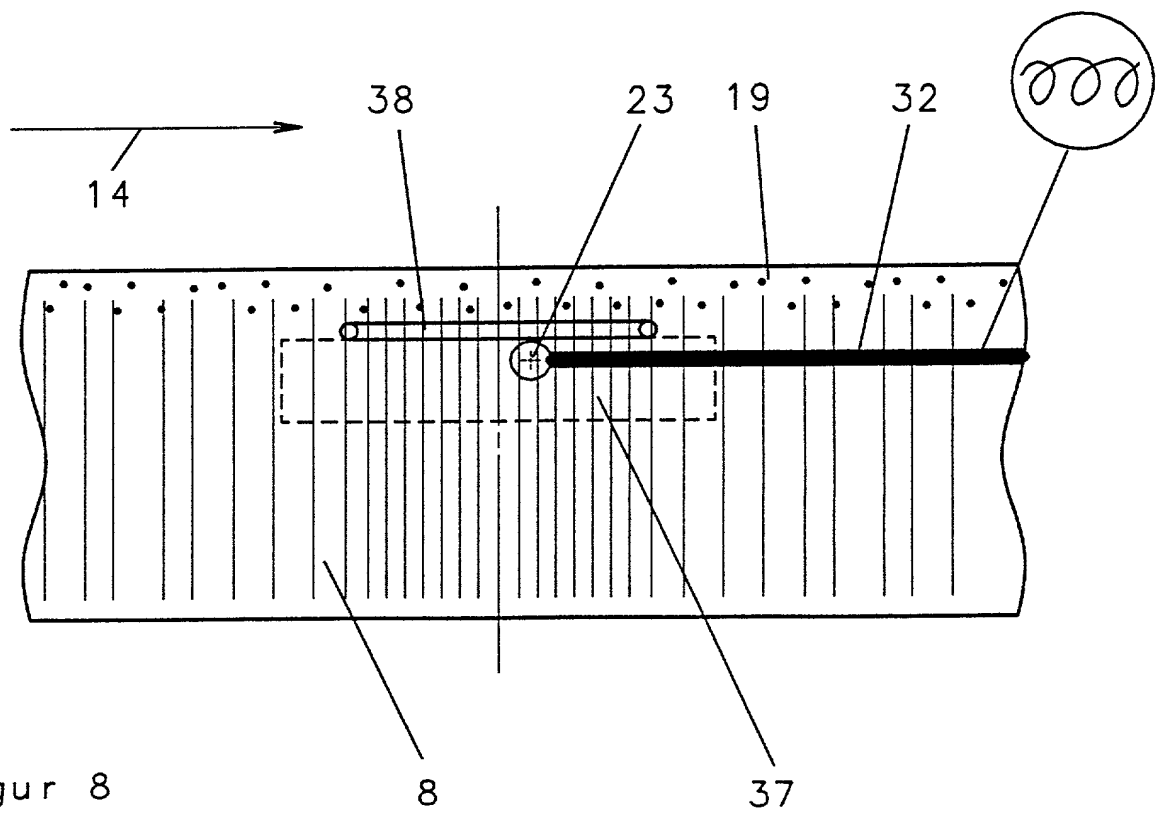

Figur 8

COMBINED DECLARATION AND
POWER OF ATTORNEY

ATTORNEY DOCKET NO. 693

As a below-named inventor, I hereby declare that:

Andreas STOEHRMANN
Marc-Aurel VOTH

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention **METHOD OF EDGE GLUEING, AND TENSIONING AGGREGATE WITH A DEVICE FOR EDGE GLUEING** the specification of which:

(Check one) X is attached hereto.

_____ was filed on _____ as

Application Serial No. _____ and

was amended on _____
(if applicable)

was amended through _____
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section § 119, of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s):

Priority Claimed

<u>198 27 647.8</u>	<u>DE</u>	<u>JUNE 22, 1998</u>	<u>X</u>	
Priority Number	Country	Date filed (Priority Date)	Yes	No
<u> </u>	<u> </u>	<u> </u>	<u>Yes</u>	<u>No</u>
Priority Number	Country	Date filed (Priority Date)	Yes	No
<u> </u>	<u> </u>	<u> </u>	<u>Yes</u>	<u>No</u>
Priority Number	Country	Date filed (Priority Date)	Yes	No

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is

[illegible]

(Application Serial No.)	(Filing Date)	(Status - Patented, pending, abandoned)

The undersigned hereby authorizes **Michael J. Striker** and the firm of **Striker, Striker & Stenby**, to accept and follow instructions from:

as to any action to be taken in the Patent and Trademark Office regarding this application without direct communication between Michael J. Striker, the firm of Striker, Striker & Stenby, and the undersigned. In the event of a change in the persons from whom instructions may be taken, Michael J. Striker and the firm of Striker, Striker & Stenby will be so notified by the undersigned.

Michael J. Striker, Registration No. 27233
Ilya Zborovsky, Registration No. 28563
William G. Valance, Registration No.: 28275

Address all correspondence to: **Striker, Striker & Stenby**
103 East Neck Road
Huntington, New York 11743
U.S.A.

Signature:	Date:	Residence and Full Postal Address: Schulweg 8 21514 Witzeze Germany
Full Name of First or Sole Inventor: Andreas STOEHRMANN	Citizenship: DE	
Signature:	Date:	Residence and Full Postal Address: Hamburger Rathausstrasse 31 21073 Hamburg Germany
Full Name of Second Inventor: Marc-Aurel VOTH	Citizenship: DE	
Signature:	Date:	Residence and Full Postal Address:
Full Name of Third Inventor:	Citizenship:	
Signature:	Date:	Residence and Full Postal Address:
Full Name of Fourth Inventor:	Citizenship:	
Signature:	Date:	Residence and Full Postal Address:
Full Name of Fifth Inventor:	Citizenship:	
Signature:	Date:	Residence and Full Postal Address:
Full Name of Sixth Inventor:	Citizenship:	
Signature:	Date:	Residence and Full Postal Address:
Full Name of Seventh Inventor:	Citizenship:	
Signature:	Date:	Residence and Full Postal Address:
Full Name of Eighth Inventor:	Citizenship:	